



# EU-TYPE EXAMINATION CERTIFICATE



The following model of Personal Protective Equipment has been subjected to an EU-type examination in accordance with the module B of the PPE regulation (2016/425) and has been shown to satisfy to essential health and safety requirements.

**Certificate N° 0075/955/162/10/19/3029**

Issued by CTC, Notified Body N°0075, to the following model of personal protective equipment :

**Manufacturer :** SHANGHAI OMA SAFETY PRODUCTS CO., LTD.  
ROOM 506, NO. 23, LANE 423, XINCUN ROAD, SHANGHAI 200065  
CHINA

### Description

**PPE Type :** *protective glove against mechanical risks*

**Product reference :** 12301010

**Article code :** -

**Glove description :** Latex coated gloves, interlock liner, knit wrist

**Available sizes :** 7 8 9 10 11

**Pictures :**



**VENNER** ART.: 12301010  
**SIZE: 10**

EN388  .....

**3121X**  **Room 506, No. 23,  
Lane 423, Xincun Road,  
Shanghai 200065, China**

**Reference standard :**

**Levels of performance / class of protection**

**EN 420:2003+A1:2009**

-

**EN 388:2016**

**3 1 2 1 X**

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

**At the date of certificate the product is in compliance with Annex XVII of REACH regulation (n° 1907/2006 and revisions)**

Full description of the PPE, reference rules verified in the context of the EU-type examination and information given on the product are detailed in the manufacturer's technical file and the Instruction for Use index 01 dated from OCTOBER 2019

NOTA : Any modification to new items of the personal protective equipment object of this EU type approval certificate or any modification of the information contained in the manufacturer technical file which served for the deliverance of the EU type approval certificate (change of address, change of company status) should be brought to the attention of the notified body in accordance with Annex V §7.2 of Regulation 2016/425.

**Issued in Lyon by**  
**Maxence DREVET**  
**Project Certification Manager**

**Date of first issue :** 16 October 2019  
**End of validity date :** 16 October 2024



Original CTC



In application of the Regulation 2016/425 of the European parliament and the Council of 9th March 2016 related to Personal Protective Equipment and repealing the Directive 89/686/EEC.

[www.ctcgroupe.com](http://www.ctcgroupe.com)

[cemarking@ctcgroupe.com](mailto:cemarking@ctcgroupe.com)

CTC - 4, rue Hermann Frenkel - 69367 Lyon cedex 07 - France  
Tél. : +33 (0)4 72 76 10 10 - Fax : +33 (0)4 72 76 10 00 - [ctclyon@ctcgroupe.com](mailto:ctclyon@ctcgroupe.com)

Comité Professionnel de Développement Économique (CPDE) Cuir Chaussure Maroquinerie Ganterie  
Loi 78-654 du 22.06.1978 - Siret 77564972600160 - Code NAF 9412Z - TVA FR 88775649726

**SHANGHAI OMA SAFETY PRODUCTS CO., LTD.**

**MANUFACTURER'S TECHNICAL FILE TO THE  
PPE REGULATION 2016/425**

<b>Reference of the product</b>	<b>:</b>	<b>12301010</b>
<b>Article code</b>	<b>:</b>	<b>-</b>
<b>Technical file index</b>	<b>:</b>	<b>01</b>
<b>Last update</b>	<b>:</b>	<b>OCTOBER 2019</b>

## IDENTIFICATION

Reference of the product :	:	12301010
Article code :	:	-
Basic Model		
Technical file index :	:	01
Last update :	:	OCTOBER 2019

### **Manufacturer :**

SHANGHAI OMA SAFETY PRODUCTS CO., LTD.  
ROOM 506, NO. 23, LANE 423, XINCUN ROAD, SHANGHAI 200065  
CHINA

tel : 0086-21-32092351  
fax : 0086-21-32092350

### **Factory :**

SHANGHAI OMA SAFETY PRODUCTS CO., LTD.  
ROOM 506, NO. 23, LANE 423, XINCUN ROAD, SHANGHAI 200065  
CHINA

tel: 0086-21-32092351  
fax: 0086-21-32092350

## GLOVE DESCRIPTION

### General glove description :

Latex coated gloves, interlock liner, knit wrist  
type of coating finish : crinckle

### Visual description (picture back and palm sides) :



### Field of use

construction for mechanical risks, alcohol barrels carrying, loading & unloading, DIY, gardening, landscaping

Risk assessment (Essential Health and Safety Requirement. Annex II - PPE Regulation)			
		Applicable	Covered by
§1	Requirements defined in the Annex II §1 are applicable to all PPE	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking
§1.4	Manufacturer's instructions and information is available	<input checked="" type="checkbox"/>	<input type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input type="checkbox"/> Marking
§2.4	If it is known that the design performance of new PPE may be significantly affected by ageing, the month and year of manufacture and/or, if possible, the month and year of obsolescence must be indelibly and unambiguously marked on each item of PPE placed on the market and on its packaging.	<input checked="" type="checkbox"/>	<input type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking
§2.5	PPE which may be caught up during use	<input checked="" type="checkbox"/>	<input type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input type="checkbox"/> Marking
§2.12	PPE bearing one or more identification markings or indicators directly or indirectly relating to health and safety	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking
§3.3	The PPE is intended to protect against mechanical injuries	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking

### Available sizes :

Minimum length of glove (mm)	Sizes
230	7
240	8
250	9
260	10
270	11

## **Glove constitution :**

	Reference	Color	Material	Surfacic mass (g/m <sup>2</sup> )	Gauges	Thickness
Palm		Yellow	Latex	1300g/m <sup>2</sup>		1.00mm
		Beige	Cotton	130g/m <sup>2</sup>	32	
Back		Yellow	Latex	1300g/m <sup>2</sup>		1.00mm
		Beige	Cotton	130g/m <sup>2</sup>	32	
Cuff		Beige	cotton/elastic	300g/m <sup>2</sup>	24	

## **PROTECTION SCOPE**

This glove meets the essential requirements of the Personal Protective Equipment Regulation 2016/425.  
This glove is designed against mechanical risks.  
It is a category II product.

## **GENERAL REQUIREMENTS**

### **Standard EN 420 : 2003 + A1 : 2009**

Dexterity : 5

Size : conform

At the date of certificate the product is in compliance with Annex XVII of REACH regulation (n° 1907/2006 and revisions)

## **SPECIFIC REQUIREMENTS AND PERFORMANCE LEVELS**

### **Mechanical hazard EN 388 : 2016**

<b>Protection offered</b>	<b>Performance levels</b>
Abrasion resistance	3
Blade cut resistance	1
Tear strength resistance	2
Puncture resistance	1
Cut Resistance method (EN ISO 13997)	X
Impact Protection	-

The levels of performance have been measured on the palm

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.


## TEST REPORTS

Laboratory	CTC	Other
EN 420 + innocuousness	S190100420_1; S190302047_1; S190100989_1(DMFu)	
EN 388	S190100420_1	

## MARKING - PACKAGING

### Information printed on the glove :

Logo of Manufacturer :

Logo 

Glove's reference : 12301010

Article Code : -

Size indicator


Pictograms related to risks against which protection is offered with performance levels

Information pictogram

Address of Manufacturer :

Date of Manufacture (month/year) and/or Serial number :

### Marking example :

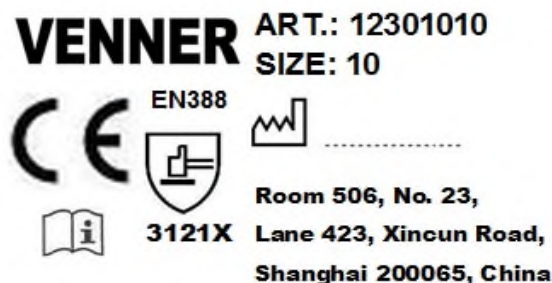

### Method of marking on the glove :

Printing on the back of gloves.

### Packaging :

One dozen pairs in a polybag. 10 dozen pairs in an export carton.

### PPE subject to ageing :

Peremption period : 2 years when stored in appropriate conditions (humidity, temperature, clean , ventilated, light). Before use, the glove shall be visually controlled, in case of deterioration the gloves must be scrapped (abrasion, cut, tear, ...).

## **Declaration of conformity :**

Available with product.

## **MEANS OF CONTROL**

- 1) Regular occupation training.
- 2) Technicians in charge of sourcing the qualified materials, e.g. Acrylic and yarn.
- 3) Before sewing, the raw materials are tested in accordance with the EN420+AZO Dyes.
- 4) Automatic sewing machines guarantee good stitchwork and workmanship.
- 5) Cutting with moulds to ensure the accurate size and shape of products.
- 6) Dipping with production line and by automatic machines to guarantee average quality.
- 7) During the production, the tests are made to check the PH, CrVI, AZO DYES.
- 8) Every month, we make the tests to ensure the finished products in accordance with the EN388 and EN420.
- 9) Practical inspectors check the products by 100% to ensure all the products are with good quality.
- 10) A vice director take responsibility for quality control of all above process.

## INSTRUCTION FOR USE

### SHANGHAI OMA SAFETY PRODUCTS CO., LTD.

ROOM 506, NO. 23, LANE 423, XINCUN ROAD, SHANGHAI 200065

CHINA


Glove reference : 12301010

Article code: -

User notice index : 01

Last update : OCTOBER 2019

Available sizes : 7 8 9 10 11

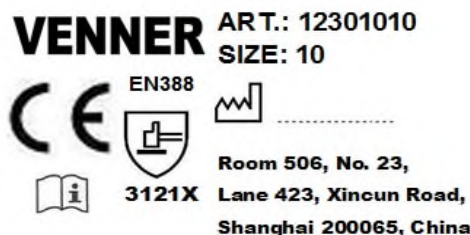

#### Glove description :

Latex coated gloves, interlock liner, knit wrist

THIS GLOVE IS A PERSONAL PROTECTIVE EQUIPMENT BELONGING TO THE CATEGORY II.

It meets the requirements of the PPE Regulation 2016/425 applicable from April 21th, 2018 : innocuousness, comfort, solidity.

It has been subject to a UE-type Examination performed by :

C.T.C. (OO75)  
4, rue Hermann Frenkel  
69367 LYON Cedex 07  
FRANCE

#### Applicable standards :

The glove meets the requirements of the standard EN 420 : 2003 + A1 : 2009 « General requirements for work glove ». Dexterity : 5

Moreover, this glove has been designed for the following applications :

##### Application :

Mechanical hazard - EN 388 : 2016



3 1 2 1 X

Levels of performance

Abrasion resistance	3	(on 4 maxi)
Blade cut resistance	1	(on 5 maxi)
Tear resistance	2	(on 4 maxi)
Puncture resistance	1	(on 4 maxi)
Cut Resistance method (EN ISO 13997)	X	(A to F)
Impact Protection		

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

#### Protection limit :

Users should be warned that gloves should not be worn when there is a risk of entanglement by moving parts of machines.

This model does not contain any substances at levels that are known to, or suspected to, adversely affect user hygiene or health.

The protection against risks or hazards which are not mentioned in this document is not warranted.

The levels of performance mentioned are only valid for the palm of the glove.

The levels of performance mentioned are only valid for new gloves, not washed, nor regenerated.

These levels of performance are obtained from the tests done according to conditions defined by the applicable standards.

This glove shall not be in contact with fire

Contains natural rubber latex, which could cause allergic reaction, including anaphylactic choc.

Before use, the glove shall be visually controlled, in case of deterioration the gloves must be scrapped (abrasion, cut, tear, ...).

For gloves with different layers of material, the performance levels are warranted only for the whole glove.

#### Storage and cleaning notice

Keep in its original packaging, under ordinary temperature and humidity conditions and in clean, covered and ventilated premises.

#### PPE subject to ageing :

Peremption period : 2 years when stored in appropriate conditions (humidity, temperature, clean, ventilated, light). Before use, the glove shall be visually controlled, in case of deterioration the gloves must be scrapped (abrasion, cut, tear, ...).

#### Declaration of conformity :

Available with product.